FS25 Series INDUSTRIAL HOSE PUMPS

Designed to meet the demanding requirements of chemical injection, dispensing and transfer applications.



The FS25 Series peristaltic pump is a two-shoe design, 180° apart on a rotating wheel, successively compressing a reinforced rubber hose. The motion of the shoes compresses the rubber against the pump housing creating continuous suction at the inlet of the pump and pushing the fluid to the outlet of the pump.

The sealed pump casing contains a lubricant that reduces friction of the shoes moving over the rubber hose. The pumped fluid is in contact only with the interior of the rubber hose, thus permitting the pumping of a wide variety of reactive fluids. PERISTALTIC HOSE PUMP

SAFETY FIRST - Sealed Pumphead Design - Hose Rupture Detector An optional hose rupture detector will automatically shut down the pump and signal an alarm in the event of a hose leak.


Together, the unique sealed pump design and the Hose Rupture Detector help to protect operators and other equipment from potentially dangerous fumes and chemicals.



FS25 FEATURES

- Flows to 12 GPM, Pressures to 218 psi.
- Viscosities to 100,000 cps
- Seal-less pumping technology
- Self-priming suction lifts to 30ft vertical
- Glycerine filled pumphead for extended hose life
- Flanged connections with PP, PVDF or 316SS Inserts
- No check valves few moving parts
- Dry running without damage


FLOMOTION FS25 SERIES ENGINEERING SPECIFICATIONS FLOMOTION FS25 SERIES PUMP PERFORMANCE

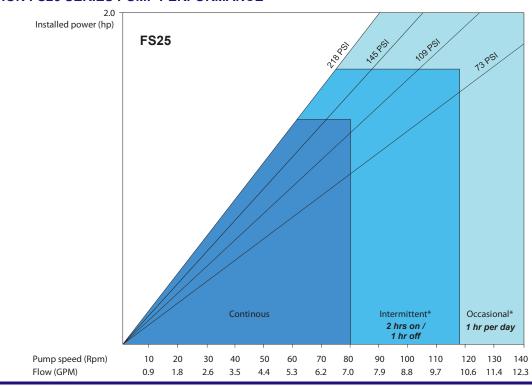


FS25 SPECIFICATIONS AND DIMENSIONS in [mm]

GEARMOTOR 2HP, 230 VAC, 3-PH, TEFC, INVERTER DUTY WITH CORROSION RESISTANT EPOXY COATED FINISH PUMPHEAD DUCTILE IRON AND PAINTED WITH INDUSTRIAL GRADE CORROSION RESISTANT PAINT

PUMP ROTOR ASTM CLASS 45B CAST IRON WITH TWO INTEGRALLY MOUNTED SHOES WITH SHIMS LOCATED 180° APART PROCESS CONNECTIONS 1" ANSI 150# FLANGES 316 STAINLESS STEEL PROCESS CONNECTION INSERTS POLYPROPYLENE PTFE 316 STAINLESS STEEL HOSE MATERIAL NATURAL RUBBER EPDM BUNA-N HYPALON VITON

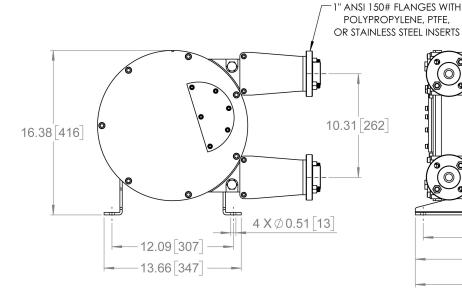



FLOMOTION SYSTEMS Inc. 3 North Main St.

Middleport, NY 14105 Tel: 716-691-3941 Email: info@flomotionsystems.com www.flomotionsystems.com

